

# Aestetica LED


Emergency lighting fixture and fixture with exit sign that meets international safety standards using the latest LED technology. Highly efficient optical system and very easy installation rank these fixtures among the most cost-effective lighting products on the market. Thanks to IP40 and the construction of durable polycarbonate fixture Aestetica LED is suitable for general use in interior areas and demanding operating conditions.





W**	• Dimensions (mm) •			Source
	L	B	H	
6-8-11-24	292	102	36.8	LED

\*\* Indicative power for comparison with fluorescent tube lighting

Visible distance	
Exit sign	15 m
Exit sign Bandiera	20 m



## ACCESSORIES: TO BE ORDERED SEPARATELY

Code	Description	Pcs
4266	holders for recessed mounting	1
4265	bracket for flag installation on wall	1
3733	recessed box into the wall	1
16230	exit sign right	1
16231	exit sign left	1
16232	exit sign down	1
4267	 exit sign left, right Bandiera	1
4268	 exit sign down Bandiera	1

## German standard

16233	exit sign LEFT / RIGHT Bandiera	1
16234	exit sign DOWN Bandiera	1
16235	exit sign RIGHT	1
16236	exit sign LEFT	1
16237	exit sign DOWN	1


## Technical data

Mounting: on ceiling or wall, recessed mounting

Diffuser: clear plastic

Body and reflector: white polycarbonate

Rated voltage: 230 V / 50 Hz

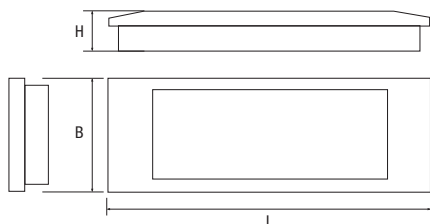

W	Code	Article	Duration	Battery	LED	Lum. flux SE	Absorption W	Kg	Pckg / pcs
6	16220	6 W SE 1H	1 h	NiMH 3.6 V 1.2 Ah	10 pcs	75 lm	0.7	0.5	12
8	16221	8 W SE 1H	1 h	NiMH 3.6 V 1.2 Ah	16 pcs	120 lm	0.7	0.5	12
11	16222	11 W SE 1H	1 h	NiMH 3.6 V 1.2 Ah	20 pcs	150 lm	0.7	0.5	12
11	16223	11 W SA 1H	1 h	NiMH 3.6 V 1.2 Ah	20 pcs	150 lm (SE) / 75 lm (SA)	1.6	0.5	12
24	16224	24 W SE 1H	1 h	NiMH 3.6 V 1.2 Ah	32 pcs	240 lm	0.9	0.6	12