


Aries W LED

Recessed LED luminaires IP54/20 – universal mounting into ceiling modules M600 and plaster ceilings

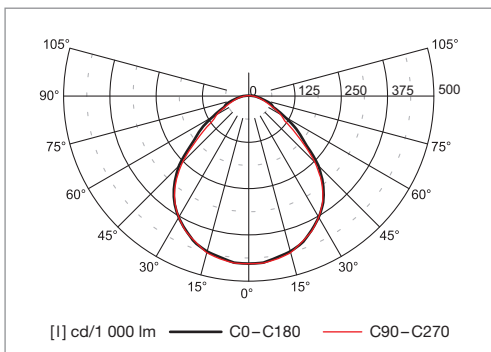

Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- diffuser: microprismatic optics

Degree of protection: IP54/20 – IP54 (frame to the body of the luminaire), IP20 body of the luminaire

Rated voltage: 230 V/50 Hz

Control gear: LED driver, the luminaires are offered also in emergency version

Mounting: universal mounting into ceiling modules M600 and plaster ceilings


Holder is components of the luminaire.

Accessories: (to be ordered separately)

19355 – inverter LED AT/LG 6W 55V 123H

Application: operating theaters, hospitals, laboratories, precincts with high humidity and dustiness, precincts demanding high sanitary codes

Mounting hole in plaster ceiling

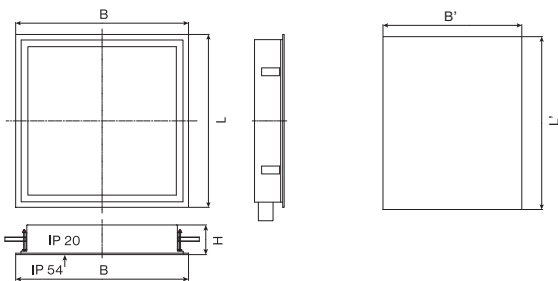


MTBF of power supply** 50 000 h
(MTBF: Mean Time Between Failures)

Luminous flux decrease:** > 50 000 h (L90B10)


Color temp. stability: 3 SDCM

** Applies to ambient temperature 25°C

MOUNTING INTO PLASTER CEILING



MOUNTING INTO CEILING MODULE M600



Power* W	Code	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	EEC	Hole cut out L' x B' (mm)	L x B x H (mm)	Kg
4x14	35-909/414/NW	41	4 400	107	4 000	>80	A+	565 x 565	595 x 595 x 112	4.5
4x14	35-909/414/TW	41	4 400	107	4 000	>80	A+	565 x 565	595 x 595 x 112	4.5

* Indicative power just for fluorescent fixtures comparison purpose

N – LED driver

T – LED driver dimmable DALI

M – frosted acrylic, X – prismatic and Z – opaline diffuser on request