


Ceiling luminaires IP65

36-06 | arietis

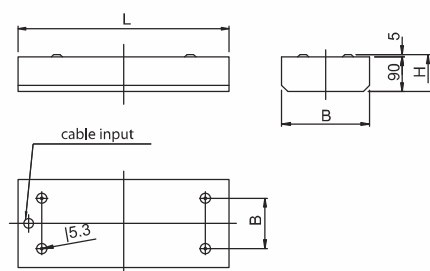

Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- cover: prismatic


Degree of protection: IP 65

Rated voltage: 230V/50Hz

Control gear: low loss ballast or electronic ballast, dimmable ballast by request; the luminaires are offered also in emergency version

Mounting: built-up on a ceiling


Application: hospitals, laboratories, premises with high humidity and dustiness, premises demanding high hygienic standards

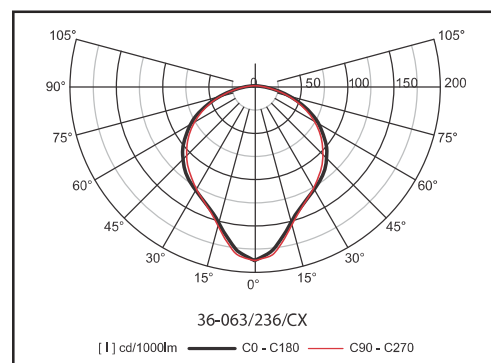


Code	Power	Lamp	Cap	LxBxH (mm)	Kg
36-063/236/X	2x36W	T8 lamp	G13	1292x381x95	9,1
36-063/258/X	2x58W	T8 lamp	G13	1592x381x95	10,8
36-063/228/CX	2x28W	T5 lamp	G5	1292x381x95	9,1
36-063/235/CX	2x35W	T5 lamp	G5	1592x381x95	10,8
36-063/414/CX	4x14W	T5 lamp	G5	682x677x95	8,0
36-064/236/X	2x36W	compact fl. lamp	2G11	482x414x95	5,0
36-064/255/CX	2x55W	compact fl. lamp	2G11	604x414x95	5,4
36-064/336/X	3x36W	compact fl. lamp	2G11	482x565x95	5,4
36-064/355/CX	3x55W	compact fl. lamp	2G11	604x565x95	5,8

- E (low loss ballast) - C (electronic ballast)

arietis | 36-07

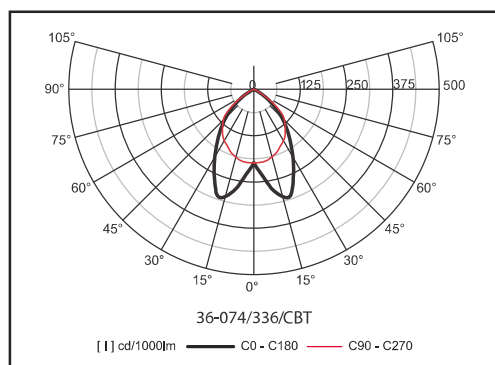

Ceiling luminaires IP65

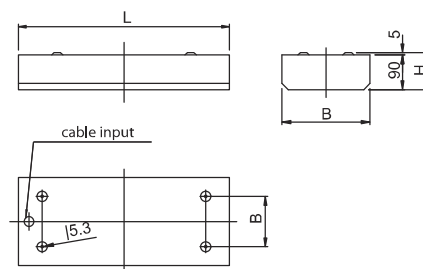

Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- louvre: highly polished parabolic louvre
- cover: safety hardened glass

Degree of protection: IP 65

Rated voltage: 230V/50Hz

Control gear: low loss ballast or electronic ballast, dimmable ballast by request; the luminaires are offered also in emergency version

Mounting: built-up on a ceiling

Application: hospitals, laboratories, premises with high humidity and dustiness, premises demanding high hygienic standards

Code	Power	Lamp	Cap	LxBxH (mm)	Kg
36-073/236/BT	2x36W	T8 lamp	G13	1292x381x95	12,0
36-073/258/BT	2x58W	T8 lamp	G13	1592x381x95	14,3
36-073/228/CBT	2x28W	T5 lamp	G5	1292x381x95	12,0
36-073/235/CBT	2x35W	T5 lamp	G5	1592x381x95	14,3
36-073/414/CBT	4x14W	T5 lamp	G5	682x677x95	9,0
36-074/236/BT	2x36W	compact fl. lamp	2G11	482x414x95	6,2
36-074/255/CBT	2x55W	compact fl. lamp	2G11	604x414x95	6,6
36-074/336/BT	3x36W	compact fl. lamp	2G11	482x565x95	6,9
36-074/355/CBT	3x55W	compact fl. lamp	2G11	604x565x95	7,3

- E (low loss ballast) - C (electronic ballast)