
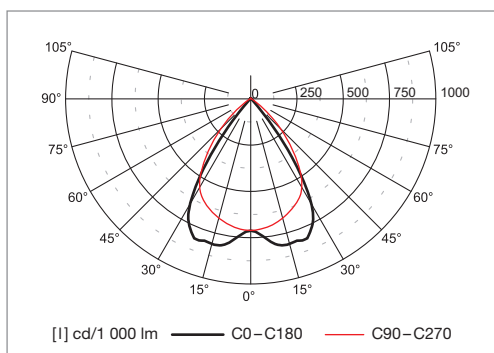


Carella LED

LED luminaires – universal mounting into ceiling modules M600 and plaster ceilings
 – surfaced mounting on ceiling

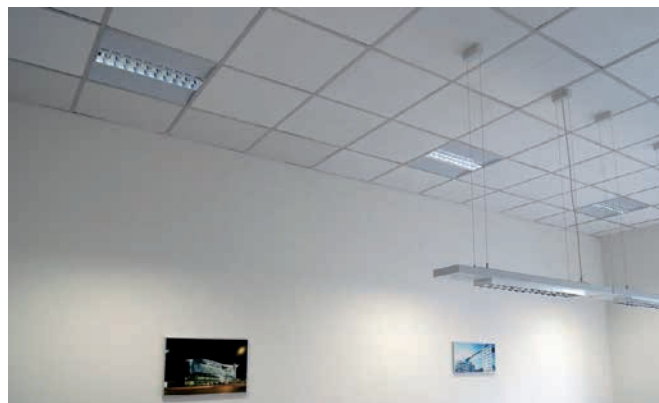

Material:

- body: steel sheet finished by powder technology varnishing
- color: white RAL 9003
- louvre: highly polished parabolic louvre

Degree of protection: IP20

Rated voltage: 230 V/50 Hz

Control gear: LED driver, the luminaires are offered also in emergency version

Mounting: universal mounting in ceiling module M600 and plaster ceilings; surfaced mounting on ceiling

Accessories: (to be ordered separately)


99-298 – holders into panel ceilings (4 pcs)

99-299 – holders into plaster ceilings (4 pcs)


19350 – Module EM Eco LED SE 1N RM

Application: offices, hospital rooms and waiting rooms, counter space and medical offices

Recessed version

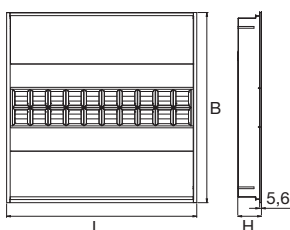


Surfaced version




Surfaced version

MOUNTING IN PLASTER CEILING

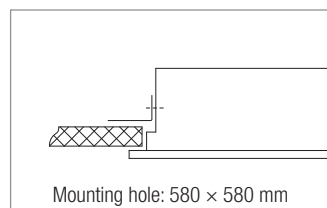

MOUNTING IN MODULE M600

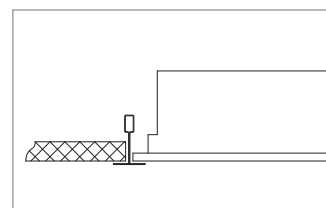

EMERGENCY LED MODULE



Power* W	Code	Mounting	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	L × B × H (mm)	Kg
4×18	A14-10037C	recessed	37	2 800	76	4 000	>80	595 × 595 × 74	5.0
4×18	A14-10038C	surfaced	37	2 800	76	4 000	>80	603 × 603 × 76	5.0

* Indicative power just for fluorescent fixtures comparison purpose