
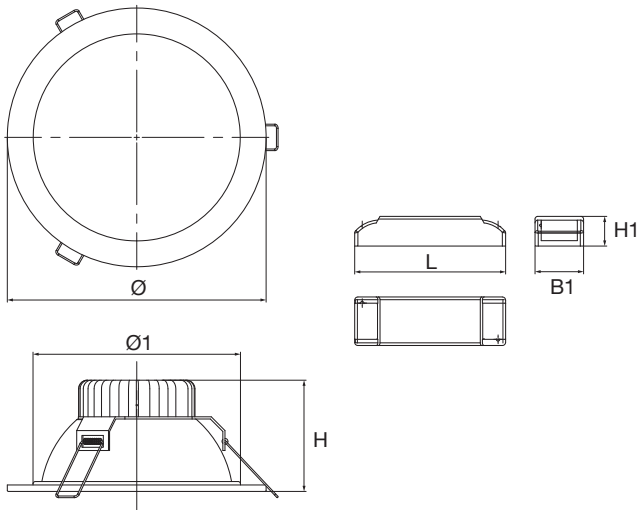


# Downlight LED

## Recessed LED luminaires

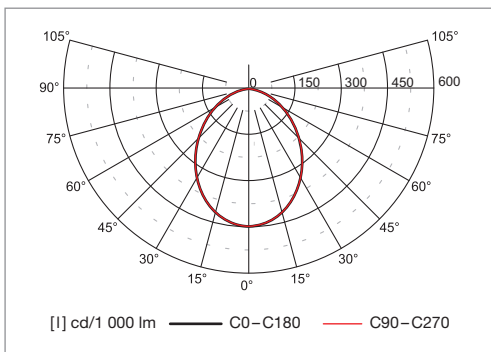

### Material:

- body: aluminum with white frame
- diffuser: opal polycarbonate

**Ambient temperature:** -20 ÷ 40°C

**Degree of protection:** optical part IP40, ballast box IP20

**Rated voltage:** 230 V/50 Hz

**Control gear:** LED driver, the luminaires are offered also in emergency version

**Service life:** 30 000 hours

**Mounting:** recessed into ceiling

**Application:** shops, stairways, corridors in shopping centers, vestibules, hotels and restaurants

| Ø                 | • Dimensions (mm) • |     |   |     | Mounting hole | Weight Kg |
|-------------------|---------------------|-----|---|-----|---------------|-----------|
|                   | Ø1                  | H   | L | B1  |               |           |
| 188               | 150                 | 85  |   |     | 152 + 170     | 0.5       |
| 240               | 195                 | 100 |   |     | 200 + 222     | 0.7       |
| Power supply unit |                     |     |   | 140 | 45            | 28        |

**Downlight LED REPLACES  
COMPACT FLUORESCENT FIXTURES  
2×18 W and 2×26 W**

| Code  | Article                  | Absorption W | Lum. flux (lm) | lm/W | Color temp. K | Ra  | EEC | N°LED |
|-------|--------------------------|--------------|----------------|------|---------------|-----|-----|-------|
| 71030 | DWL LED PW 155 15W 3000K | 15           | 1 250          | 83   | 3 000         | >80 | A+  | 36    |
| 71031 | DWL LED PW 155 15W 4000K | 15           | 1 450          | 97   | 4 000         | >80 | A+  | 36    |
| 71032 | DWL LED PW 205 25W 3000K | 26           | 1 950          | 75   | 3 000         | >80 | A+  | 45    |
| 71033 | DWL LED PW 205 25W 4000K | 26           | 2 300          | 89   | 4 000         | >80 | A+  | 45    |