
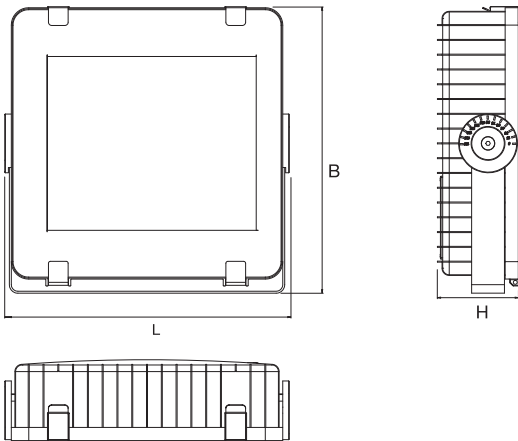


F250/F400 LED

Floodlights LED



Material:

- body: die-cast aluminum in grey color RAL 7040
- diffuser: tempered glass 5 mm
- optic system: polished aluminum – symmetric, asymmetric
- clips: stainless steel

Ambient temperature: -20 ÷ 40°C

Degree of protection: IP66

Rated voltage: 230 V AC ±10% 50 Hz
176–256 V DC

Control gear: LED driver, the luminaires are offered also in emergency version

Mounting: on revolving bracket

Accessories: (to be ordered separately)

19364 – inverter LED IP65 LG 123H

19365 – inverter LED IP65 LGFM 123H

12658 – protective grid

Application: sports facilities, facades of historic buildings, lobbies, airfields, multifunctional halls and other industrial buildings

MTBF of power supply** 100 000 h
(MTBF: Mean Time Between Failures)

Luminous flux decrease:** 50 000 h (1×400 W) (L80B20)
60 000 h (1×250 W) (L80B20)

Color temp. stability: 3 SDCM

** Applies to ambient temperature 25°C

Power* W	Code	Article	Optic	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	EEC	L × B × H (mm)	Kg
250	F250SLED	PRO LED 250W SM	symmetric	127	15 000	118	4 000	>80	A+	438 × 434 × 121	8.8
400	F400SLED	PRO LED 400W SM	symmetric	230	26 000	113	4 000	>80	A+	438 × 434 × 121	8.8
250	F250ALED	PRO LED 250W AS	asymmetric	127	15 000	118	4 000	>80	A+	438 × 434 × 121	8.8
400	F400ALED	PRO LED 400W AS	asymmetric	230	26 000	113	4 000	>80	A+	438 × 434 × 121	8.8

* Indicative power just for discharge lamps comparison purpose.

The luminaire is supplied as standard:

F400 → 208 W

230 W*

This input will be achieved only with resistor supplied in the bag as accessory, see the instruction manual.

* This el. resistance will enable the achievement of luminous flux (lm), which is listed in the catalog.

Dimmable DALI version

Power* W	Code	Article	Optic	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	EEC	L x B x H (mm)	Kg
250	FD250SLEDDL	PRO LED DALI 250W SM	symmetric	127	15 000	118	4 000	>80	A+	438 x 434 x 121	8.8
400	FD400SLEDDL	PRO LED DALI 400W SM	symmetric	230	26 000	113	4 000	>80	A+	438 x 434 x 121	8.8
250	FD250ALEDDL	PRO LED DALI 250W AS	asymmetric	127	15 000	118	4 000	>80	A+	438 x 434 x 121	8.8
400	FD400ALEDDL	PRO LED DALI 400W AS	asymmetric	230	26 000	113	4 000	>80	A+	438 x 434 x 121	8.8

* Indicative power just for discharge lamps comparison purpose.

MOUNTING ON GROUND



MOUNTING ON WALL



REVOLVING BRACKET



PROTECTIVE GRID



12658 Protective grid



to be ordered separately

EMERGENCY LED INVERTER IP65




19364 inverter LED IP65 LG 123H

19365 inverter LED IP65 LGFM 123H



to be ordered separately
to be ordered separately

SYMMETRIC VERSION



ASYMMETRIC VERSION

