



I418 LED


LED luminaires – universal mounting into ceiling modules M600 and plaster ceilings
– surfaced mounting on ceiling

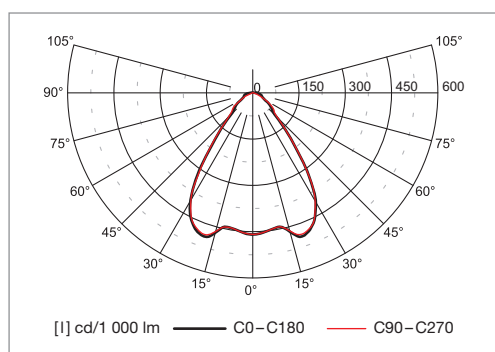

Recessed version



Surfaced version



MTBF of power supply** 65 000 h
(MTBF: Mean Time Between Failures)

Luminous flux decrease:** > 60 000 h (L80B20)
Color temp. stability: 3 SDCM

** Applies to ambient temperature 25°C

Material:

- body: steel sheet finished by powder technology varnishing
- color: white RAL 9003
- louvre: highly polished parabolic louvre

Degree of protection: IP20

Rated voltage: 230 V/50 Hz

Control gear: LED driver, the luminaires are offered also in emergency version

Mounting: universal mounting in ceiling module M600 and plaster ceilings; surfaced mounting

Accessories: (to be ordered separately)

- 1232 – adapter for surfaced mounting
- 19341 – EM LED module AT SE 1N
- 19342 – EM LED module LG SE/SA 1/3H
- 19343 – EM LED module LGFM SE/SA 1/3H
- 19355 – inverter LED AT/LG 6W 55V 1/2/3H
- 19356 – inverter LED LGFM 6W 55V 1/2/3H
- 19350 – Module EM Eco LED SE 1N RM
- 10404 – holders into plaster ceilings (4 pcs)


Application: large and small offices, lecture halls, vestibules, classrooms, computer office, boardroom

Version	L	B	H	Kg
Recessed	595	595	46	3.2
Surfaced	635	635	54	4.5


Power* W	Code	Article	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	EEC	L × B × H (mm)	Kg
4×18	I418LED	INC M600 4x18 LED B	31	3 150	102	4 000	>80	A+	595 × 595 × 46	3.2

* Indicative power just for fluorescent fixtures comparison purpose

MOUNTING IN PLASTER CEILING




10404 holders into plaster ceilings (4 pcs)



Mounting hole: 580 × 580 mm

to be ordered separately

MOUNTING IN MODULE M600



EMERGENCY LED MODULE



19350 Module EM Eco LED SE 1N RM

19341 EM LED module AT SE 1N

19342 EM LED module LG SE/SA 1/3H

19343 EM LED module LGFM SE/SA 1/3H



to be ordered separately
to be ordered separately
to be ordered separately
to be ordered separately

EMERGENCY LED INVERTER




19355 inverter LED AT/LG 6W 55V 1/2/3H

19356 inverter LED LGFM 6W 55V 1/2/3H



Box for surfaced mounting: code 1232

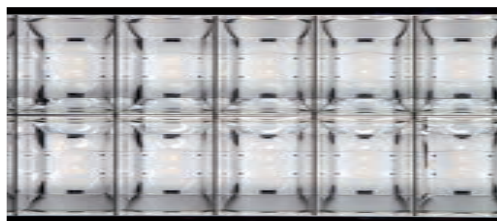

Highly polished parabolic louvre
for optimal luminous flux distribution

