



Lyra W LED

Recessed LED luminaires – universal mounting into ceiling modules M600 and plaster ceilings

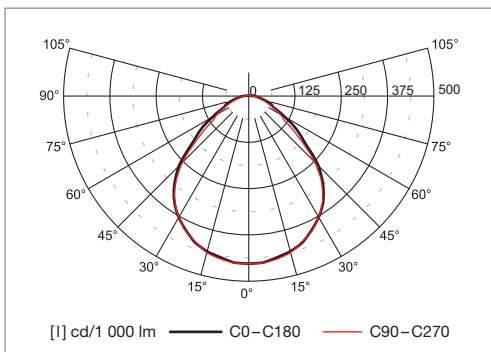

Material:

- body: steel sheet finished by powder technology varnishing
- color: white RAL 9003
- diffuser: microprismatic optics (frosted acrylic, prismatic and opaline diffuser on request)

Degree of protection: IP20

Rated voltage: 230 V/50 Hz

Control gear: LED driver, the luminaires are offered also in emergency version

Mounting: universal mounting in ceiling module M600 and plaster ceiling

Accessories: (to be ordered separately)

99-298 – steel holders for mounting in M600 module and plaster ceiling (4 pcs)

19355 – inverter LED AT/LG 6W 55V 1/2/3H


Application: computer labs, large and small offices, lecture halls

MTBF of power supply** 50 000 h
(MTBF: Mean Time Between Failures)


Luminous flux decrease:** > 50 000 h (L90B10)
Color temp. stability: 3 SDCM

** Applies to ambient temperature 25°C

MOUNTING IN PLASTER CEILING



MOUNTING IN MODULE M600



Power* W	Code	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	L x B x H (mm)	Kg
4x14	32-929/414/NW	41	4 400	107	4 000	>80	595 x 595 x 60	5.0
4x14	32-929/414/TW	41	4 400	107	4 000	>80	595 x 595 x 60	5.0

* Indicative power just for fluorescent fixtures comparison purpose

N – LED driver

T – LED driver dimmable DALI

Diffusers on request:

M – frosted acrylic, X – prismatic, Z – opaline