



GENERAL SPECIFICATIONS

- Power ratings** 4x14 W
- Protection level** IP20
- Installation** recessed, ceiling-mounted and pendant
- Case** powder-coated sheet steel
- Optic** lamellar with three types of surface treatment
- Reattore** class A2 electronic

SALVASPAZIO[®] -63% SPACE OCCUPIED



Optic J
Satin finish with rectangular ribs



Optic A
White sheet metal



Optic B
Polished DKL2

ACCESSORIES - to be ordered separately		
Order code	Description	Pack
12656	PENDANT KIT 2X28-54/4X14	1
19350	Inverter LED IP20 SE/SA 1N	1

FLUO T5 HE TRIMAX T5 ø 16 mm TRIFOSFORO HIGH EFFICIENCY linear fluorescent lamps socket G5 RA 82						
Watt	Order code	colour	colour temperature (K)	lumen (lm)	length (mm)	Packaging
14	52400	830	3000	1210	549	25
	52401 *	840	4000	1210	549	25
	52402	865	6500	1100	549	25


* Lamp provided in the 'Tubes Included' version

MF 30

recessed, ceiling-mounted and pendant

Fixture with high-performance optic, particularly well-suited for areas with video terminals. Despite being a Dark light-type fixture, the work top illumination is extremely high. The casing, made from sheet steel, is amongst the slimmest in the category (5 cm) and is therefore suitable for installation in small false-ceiling spaces. The state-of-the-art electronic ballast offers extremely high energy saving properties, providing savings of over 30% with respect to a conventional 4x18 ceiling light. The wide floating side tabs that fold back completely behind the fixture allow for recessed, ceiling-mounted and pendant installation with the same elegant looks. In addition, the folding of the side areas significantly reduces the product's footprint, providing clear advantages during transport and storage.

Symbols on page 40

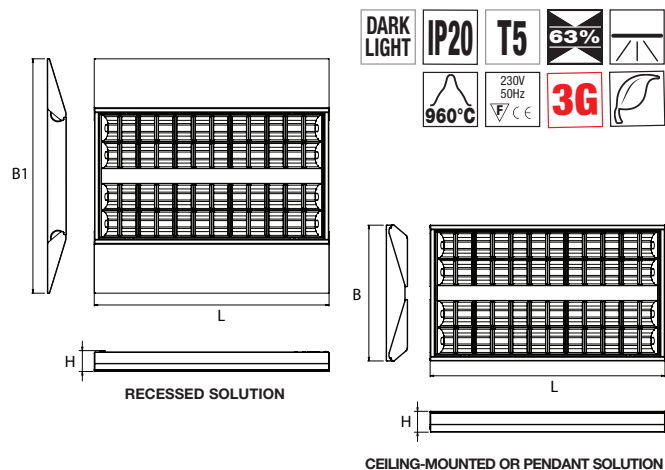

Power rating	• Dimensions (mm) •					Lamp	Socket	Pack	Weight
W	L	B	B1	H					
4x14	596	345	595	53	T5	G5	1	2,8	

MF 30

Tubes included


W	ELECTRONIC BALLAST		Optic
	Order code	Description	
4x14	414B *	MF30 4X14 T5 CB MULTIFUNCTION	B
4x14	414J *	MF30 4X14 T5 CJ MULTIFUNCTION	J
4x14	414A *	MF30 4X14 T5 CA MULTIFUNCTION	A

MF 30

Tubes not included

W	ELECTRONIC BALLAST		Optic
	Order code	Description	
4x14	414BST	MF30 4X14 T5 CB ST MULTIFUNCTION	B
4x14	414JST	MF30 4X14 T5 CJ ST MULTIFUNCTION	J
4x14	414AST	MF30 4X14 T5 CA ST MULTIFUNCTION	A


RECESSED INSTALLATION



CEILING-MOUNTED INSTALLATION



PENDANT INSTALLATION



12656 Pendant fitting Kit 2x28-54/4x14

to be ordered separately

ACCESS COMPARTMENT FOR QUICK WIRING



INSTALLATION WITH EMERGENCY LIGHTING MODULE



IP40


19350 Inverter LED IP20 SE/SA 1N

to be ordered separately

SALVASPAZIO

A standard Europallet contains
28 conventional 4x18W
 recessed fixtures
 or
75 MF 30
 recessed fixtures

-63%
 space occupied



MULTIFUNZIONE



MultiForma Technology: 3 fixtures in 1

The MF 30 fixture is designed to satisfy almost any aesthetic requirement linked with installation. The patented system is equipped with broad floating tabs that can be open, in the event of recessed installation on model M600, or folded behind the fixture to facilitate both ceiling-mounted and pendant installation. In addition, the tabs folded over the back protect the technical compartments to ensure the protection level is maintained.



MF 30

SALVASPAZIO
-63%
space occupied

MULTIFUNCTION
3 fixtures in **1**

MultiForma,
for ceiling-mounted, recessed
and pendant installations

