
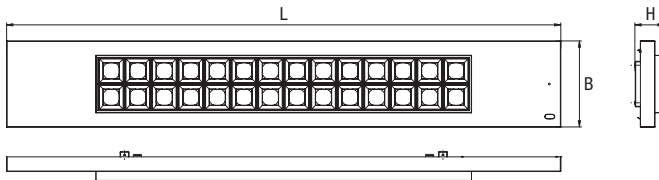
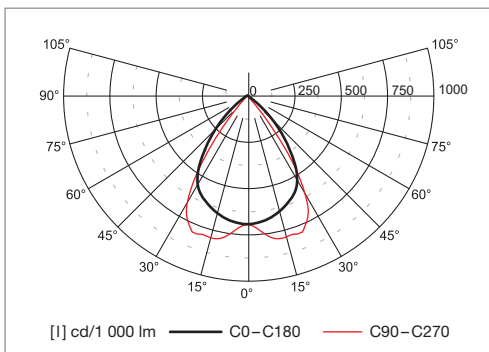


P236/P258 LED

Ceiling and suspended LED luminaires – separate/coupling in lines



MTBF of power supply** 65 000 h
(MTBF: Mean Time Between Failures)

Luminous flux decrease:** > 60 000 h (L80B20)
Color temp. stability: 3 SDCM

** Applies to ambient temperature 25°C

Material:

- body: a steel sheet finished by powder technology varnishing, polyester
- color: white RAL 9003
- louvre: highly polished parabolic

Degree of protection: IP20

Rated voltage: 230 V/50 Hz

Control gear: LED driver, the luminaires are offered also in emergency version

Mounting: ceiling or suspended

Accessories: (to be ordered separately)

20080 – wire pendant without power cable (120 cm)

20081 – wire pendant with power cable 3× 0.75 mm² (120 cm)

19350 – Module EM Eco LED SE 1N RM

19355 – inverter LED AT/LG 6W 55V 1/2/3H

19356 – inverter LED LGFM 6W 55V 1/2/3H

20087 – bracket and five-phase through-wired cable


20088 – five-phase through-wired cable

Application: offices, lecture halls, corridors and stairways, shops

Power* W	Code	Article	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	EEC	L × B × H (mm)	Kg
2×36	P236LED	Plafone LED 2x36 B 4000K	36	4 000	111	4 000	>80	A+	1 327 × 206 × 70	4.6
2×58	P258LED	Plafone LED 2x58 B 4000K	47.5	5 100	107	4 000	>80	A+	1 327 × 206 × 70	4.6


* Indicative power just for fluorescent fixtures comparison purpose

SURFACE MOUNTING



Dark Light optics with lenses for optimal lighting distribution

SUSPENDED MOUNTING – COUPLING IN LINES



20088 five-phase through-wired cable
20087 bracket and five-phase through-wired cable

to be ordered separately
 to be ordered separately

SUSPENDED MOUNTING – SEPARATE



20080 wire pendant without power cable (120 cm) to be ordered separ.
20081 wire pendant with power cable 3× 0.75 mm² (120 cm) to be ordered separ.

EMERGENCY LED INVERTER



19355 inverter LED AT/LG 6W 55V 1/2/3H
19356 inverter LED LGFM 6W 55V 1/2/3H

INSTALLATION WITH EMERGENCY MODULE ECOLED



19350 Module EM Eco LED SE 1N RM to be ordered separately

