



PaneLED

Recessed LED luminaires – mounting into ceiling modules M600

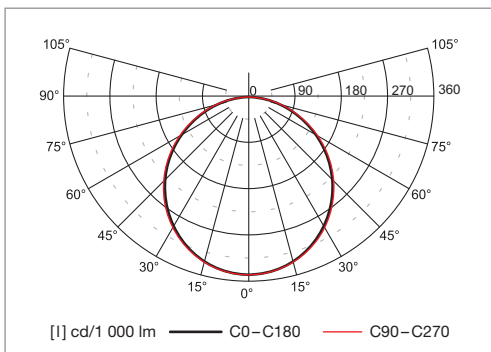

Material:

- body: aluminum frame
- diffuser: opaline PMMA

Ambient temperature: -20 ÷ 40°C

Degree of protection: IP40

Rated voltage: 230 V/50 Hz

Control gear: LED driver, the luminaires are offered also in emergency version

Service life: 35 000 hours

Mounting: recessed mounting in ceiling module M600, ceiling or pendant mounting

Accessories: (supplied with the luminaire)

Wire pendants – 2 pcs

Accessories: (to be ordered separately)

70014 – box for surfaced mounting (for version 600 × 600)

70020 – box for surfaced mounting (for version 1 200 × 300)

99-0168 – recessed frame for plaster ceiling (for version 600 × 600)

99-0169 – recessed frame for plaster ceiling (for version 1 200 × 300)

19364 – inverter LED IP65 AT/LG 123H

Application: schools, hotels, shopping centers, large and small offices, lecture halls, vestibules

PENDANT MOUNTING



RECESSED MOUNTING



BOX FOR SURFACED MOUNTING



Power* W	Code	Article	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	L × B × H × H1 (mm)	Kg
4×18	70010	PAN LED 600x600	40	3 000	75	3 000	>80	595 × 595 × 9 × 60	3.7
4×18	70011	PAN LED 600x600	40	3 000	75	4 000	>80	595 × 595 × 9 × 60	3.7
2×36	70012	PAN LED 1200x300	40	3 000	75	3 000	>80	295 × 1 195 × 9 × 60	3.7
2×36	70013	PAN LED 1200x300	40	3 000	75	4 000	>80	295 × 1 195 × 9 × 60	3.7

* Indicative power just for fluorescent fixtures comparison purpose