
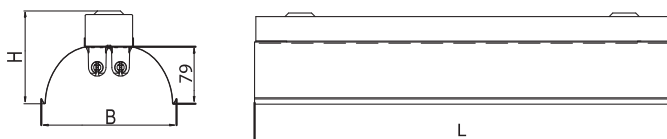


sirius | 05-00

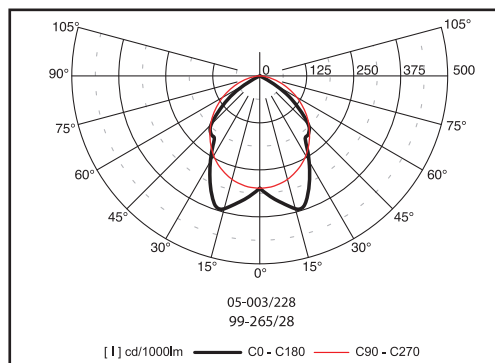


Code	Power	Lamp	Cap	LxBxH (mm)	Kg
05-003/136/□	1x36W	T8 lamp	G13	1265x188x124	3,3
05-003/158/□	1x58W	T8 lamp	G13	1565x188x124	4,3
05-003/236/□	2x36W	T8 lamp	G13	1265x188x124	3,8
05-003/258/□	2x58W	T8 lamp	G13	1565x188x124	4,8
05-003/128/C	1x28W	T5 lamp	G5	1215x188x124	3,3
05-003/135/C	1x35W	T5 lamp	G5	1515x188x124	4,2
05-003/228/C	2x28W	T5 lamp	G5	1215x188x124	3,8
05-003/235/C	2x35W	T5 lamp	G5	1515x188x124	4,7

Luminaires with 49W, 54W or 80W T5 lamps by request.

□ - E (low loss ballast, parallel compensation) - C (electronic ballast)

Ceiling and suspended luminaires with fluorescent lamps – separate

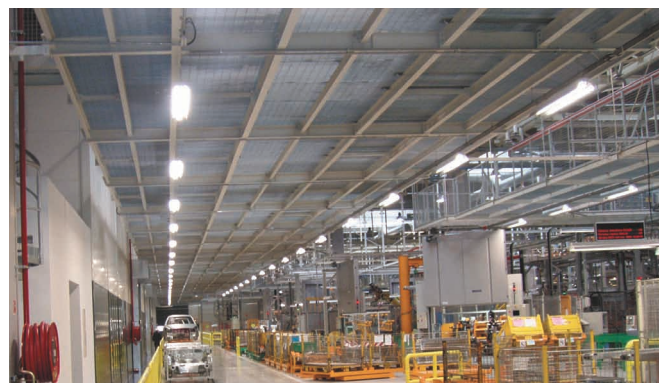

Material:

- body: steel sheet finished by powder technology varnishing
- color: grey RAL 9006
- reflector: white steel reflector, aluminium polished and faceted reflector, narrowbeam

Degree of protection: IP 20

Rated voltage: 230V/50Hz

Control gear: low loss ballast and electronic ballast, dimmable ballast by request; the luminaires are offered also in emergency version

Mounting: on a ceiling or on wire pendants

Accessories: (must be ordered separately)

wire pendant 99-096/120 – a set


reflectors

Application: halls, warehouses, shopping areas


Available reflectors

(for one and two lamp luminaires)

Luminaire	white steel	polished Al	faceted Al
28W	99-264/28	99-265/28	99-267/28
35W	99-264/35	99-265/35	99-267/35
36W	99-264/36	99-265/36	99-267/36
58W	99-264/58	99-265/58	99-267/58

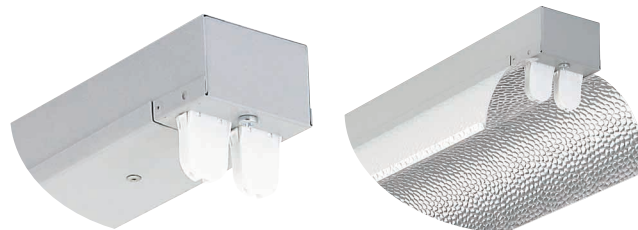

Ceiling and suspended luminaires with fluorescent lamps

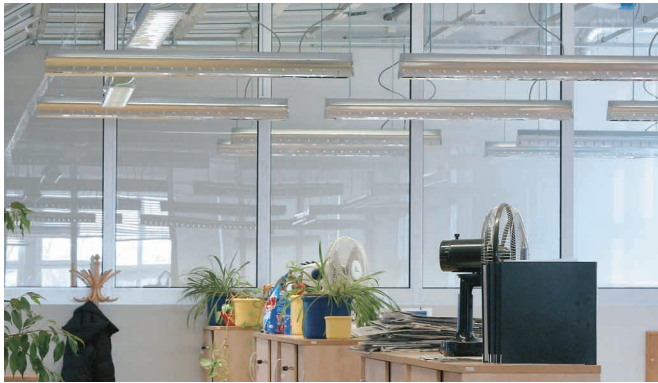

Material:

- body: a steel sheet finished by powder technology varnishing
- color: grey RAL 9006
- louvre: highly polished or matted parabolic louvre made of a pure aluminium sheet

Degree of protection: IP 20

Rated voltage: 230V/50Hz




Control gear: low loss ballast and electronic ballast, dimmable ballast by request; the luminaires are offered also in emergency version

Mounting: on a ceiling or on wire pendants

Accessories: (must be ordered separately)

wire pendant 99-096/120 - a set

Application: reception desks, corridors, shops and boutiques, restaurants, counters, computer labs, representative office, public areas



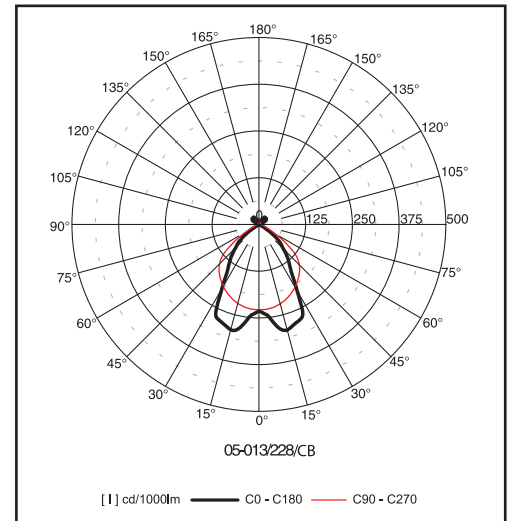


Code	Power	Louvre	Lamp	Cap	LxBxH (mm)	Kg
05-013/136/1 2	1x36W	B, C	T8 lamp	G13	1265x147x127	3,3
05-013/158/1 2	1x58W	B, C	T8 lamp	G13	1565x147x127	4,3
05-013/236/1 2	2x36W	B, C	T8 lamp	G13	1265x147x127	3,8
05-013/258/1 2	2x58W	B, C	T8 lamp	G13	1565x147x127	4,8
05-013/128/C 2	1x28W	B, C	T5 lamp	G5	1215x147x127	3,3
05-013/135/C 2	1x35W	B, C	T5 lamp	G5	1515x147x127	4,2
05-013/228/C 2	2x28W	B, C	T5 lamp	G5	1215x147x127	3,8
05-013/235/C 2	2x35W	B, C	T5 lamp	G5	1515x147x127	4,7

Luminaires with 49W, 54W or 80W T5 lamps by request.

1 - E (low loss ballast), - C (electronic ballast)

2 - B (highly polished parabolic louvre, 60°), - C (matted parabolic louvre, 60°)

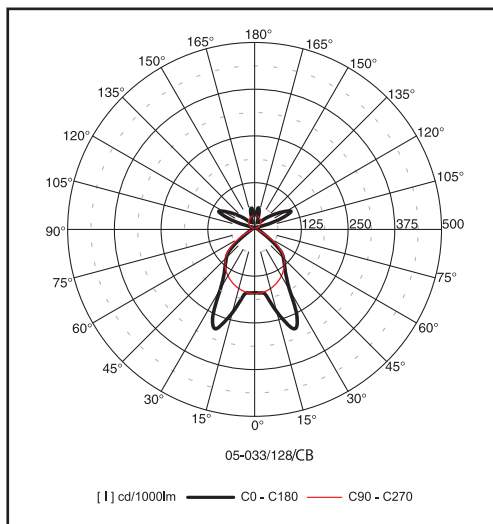

Ceiling and suspended luminaires with fluorescent lamps - direct/indirect



Material:

- body: a steel sheet finished by powder technology varnishing
- color: grey RAL 9006
- louvre: highly polished or matted parabolic louvre made of a pure aluminium sheet

Degree of protection: IP 20

Rated voltage: 230V/50Hz

Control gear: electronic ballast, dimmable ballast by request; the luminaires are offered also in emergency version

Mounting: on a ceiling or on wire pendants

Accessories: (must be ordered separately)

wire pendant 99-096/120 - a set

Application: reception desks, corridors, shops and boutiques, restaurants, counters, computer labs, representative office, public areas

Code	Power	Louvre	Lamp	Cap	LxBxH (mm)	Kg
05-033/128/C ²	1x28W	B, C	T5 lamp	G5	1215x147x127	3,3
05-033/135/C ²	1x35W	B, C	T5 lamp	G5	1515x147x127	4,2
05-033/228/C ²	2x28W	B, C	T5 lamp	G5	1215x147x127	3,8
05-033/235/C ²	2x35W	B, C	T5 lamp	G5	1515x147x127	4,7

Luminaires with 49W, 54W or 80W T5 lamps by request.

² - B (highly polished parabolic louvre, 60°)

- C (matted parabolic louvre, 60°)