

Suspended luminaires – indirect



Detail of the luminaire with prismatic cover



Material

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- reflector: highly polished aluminium reflector
- diffuser: clear PMMA

Degree of protection: IP 20

Rated voltage: 230V/50Hz

Control gear: electronic ballast

Mounting: on wire or tube pendants

02-03 – separately (the endings are supplied with luminaire)

02-04 – fit to in-line coupling

Accessories: (must be ordered separately)

endings: 99-136 ending and holder of pendant - one piece (02-04)

prismatic cover (1 pc): 14W - 99-275, 28W - 99-276, 35W - 99-277.

Two pieces for luminaire needed.




Wire pendants:

length (mm)	without a cable	with a cable 3x1,5 mm ²	with a cable 5x1,5 mm ²
600	99-077/060	99-078/060	99-079/060

Tube pendants:

length (mm)	without a cable	with a cable 3x1,5 mm ²	with a cable 5x1,5 mm ²
400	99-047/040	99-048/040	99-049/040
600	99-047/060	99-048/060	99-049/060

Application: decorative illumination of offices, restaurants, hotels

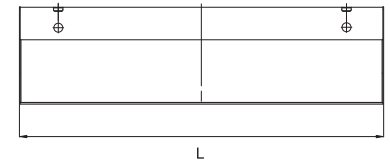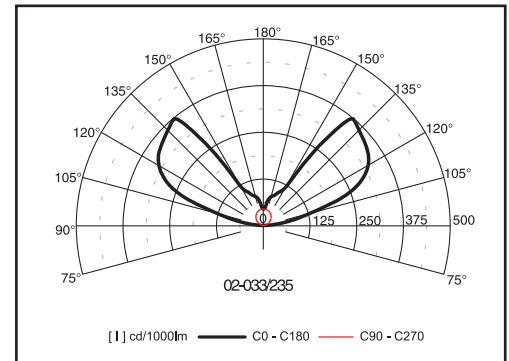

Code	Power	Lamp	Cap	LxBxH (mm)	Kg
02-033/214/C	2x14W	T5 lamp	G5	573x385x85	6,8
02-033/228/C	2x28W	T5 lamp	G5	1173x385x85	7,2
02-033/235/C	2x35W	T5 lamp	G5	1473x385x85	7,6
02-043/214/C	2x14W	T5 lamp	G5	573x385x85	6,8
02-043/228/C	2x28W	T5 lamp	G5	1173x385x85	7,2
02-043/235/C	2x35W	T5 lamp	G5	1473x385x85	7,6

Luminaires with 24W, 49W, 54W or 80W T5 lamps by request.