

La gamma **Achille** è costituita da apparecchi da incasso a filo terreno, ideali per illuminare facciate di edifici, monumenti, giardini, mettendo in risalto architetture e spazi verdi. Calpestabili e carrabili, sono costruiti con materiali altamente resistenti agli agenti di corrosione e possiedono un elevato grado di protezione IP67, risultando affidabili nel tempo e adatti per applicazioni anche in condizioni atmosferiche gravose.

Apparecchi in classe II.

Sono disponibili tre modelli, differenti nel diametro, con ottiche simmetriche orientabili o fisse. La serie **Achille** è progettata per lampade a ioduri metallici ad alta efficienza e con LED COB di ultima generazione (Achille 190 e Achille 320).

Per l'installazione prevedere un adeguato drenaggio.

The **Achille** range consists of recessed uplights installed flush in the ground, ideal for façades, monuments and gardens, highlighting architectural and green areas. Suitable for vehicles and pedestrian traffic, they are designed with materials that preserve them from the aggression of oxidizing agents. They have a high rating IP67, thus being reliable over time and suitable for application, even in severe weather conditions.

Fittings in class II.

Three models are available, with different diameters and including symmetrical, adjustable or fixed optics. The **Achille** series is designed for high efficiency metal halide lamps and COB LEDs of last generation (for Achille 190 and Achille 320).

An appropriate drainage should be provided for the installation.



- Corpo e controcassa in materiale termoplastico ad alta resistenza
Cornice e viti in acciaio inox
Riflettori in tecnopolimero metallizzato a specchio (per Achille LED) o in alluminio purissimo 99.9 (per lampade a ioduri metallici)
Vetro di chiusura temprato, con guarnizioni siliconiche a tenuta IP67
Vetro interno temprato di 4 mm (no per Achille 190 LED)
Scatola di collegamento cablaggio in materiale termoplastico con doppio pressacavo per cavi in gomma
Completi di driver di alimentazione

- Indice di resa cromatica: Ra > 85 (per Achille 190 LED e Achille 320 LED)
Tensione di alimentazione: 230/240V - 50/60Hz (elettronico); 230V - 50Hz (elettromagnetico)

- Housing and recessed housing in high-resistant thermoplastic material
Stainless steel ring and screws
Mirror-metallized technopolymer reflectors (for Achille LED) or in 99.9 pure aluminium (for metal halide lamps)
Outer tempered glass, with silicon gaskets IP67
4mm inner tempered glass (not for Achille 190 LED)
Junction box in thermoplastic material with a double cable-gland for rubber cables.
Integrated electronic supply

- Colour rendering index: Ra > 85 (for Achille 190 LED and Achille 320 LED)
Supply voltage: 230/240V - 50/60Hz (electronic); 230V - 50Hz (electromagnetic)

ACHILLE 190 LED

Codice
Code

Lampada
Lamp

lumen

Watt

Colour
T (K)

Fascio
Beam



T max



Ottica orientabile +/- 7°
+/- 7° adjustable reflector

149401 inox / stainless steel LED 1500 12 3000 30° 40°C

Controcassa già in dotazione
Recessed housing included in the fitting

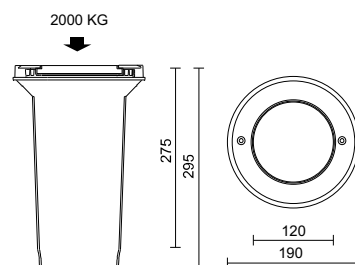

1,9

ACHILLE 190

Codice
Code

Lampada
Lamp

Watt

Attacco
Base

Fascio
Beam



T max




Ottica orientabile +/- 7°
+/- 7° adjustable reflector

149100 inox / stainless steel CDM-TC 35 G8,5 14° 100°C

Controcassa già in dotazione
Recessed housing included in the fitting

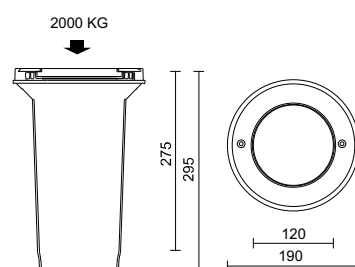

2,2

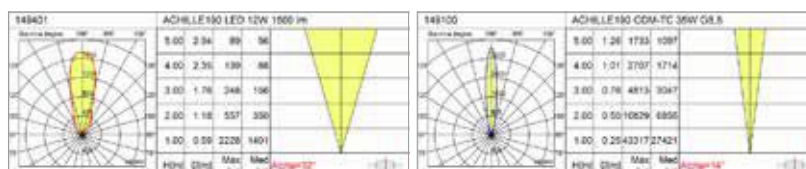

ACHILLE 320 LED

Codice
Code

Lampada
Lamp

lumen

Watt

Colour
T (K)

Fascio
Beam

T max





Ottica orientabile +/- 15°
+/- 15° adjustable reflector

147900	inox / stainless steel	LED	2000	18	3000	30°	35°C
148000	inox / stainless steel	LED	3400	27	3000	25°	35°C



160348

Controcassa da ordinare separatamente
Recessed housing to be ordered separately

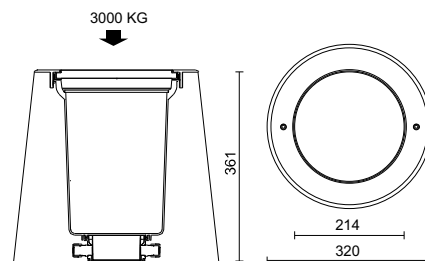

ACHILLE 320

Codice
Code

Lampada
Lamp

Watt

Attacco
Base

Fascio
Beam

T max

kg





Ottica orientabile +/- 15°
+/- 15° adjustable reflector

148400	inox / stainless steel	MT	70	G12	33°	115°C	7,2
148500	inox / stainless steel	MT	150	G12	93°	165°C	8,0



160348

Controcassa da ordinare separatamente
Recessed housing to be ordered separately

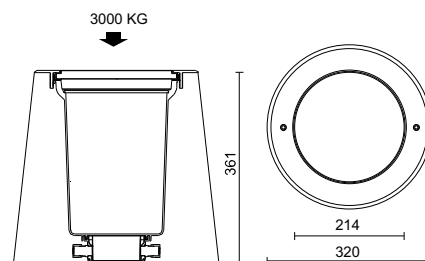

ACCESSORI ACCESSORIES

Ottiche professionali per Achille 320 LED in termoplastico metallizzato a specchio o bianco (per 70°)
Professional optic for Achille 320 LED in thermoplastic mirror metallized or white (for 70°)

Cod 2000 lm 3400 lm

28-3140



—

28-3142




—



28-3138



28-3141



ACHILLE 450

Codice
Code

Lampada
Lamp

Watt

Attacco
Base

Fascio
Beam

T max






Ottica orientabile +/- 15°
+/- 15° adjustable reflector

147400	inox / stainless steel	MD	150	RX7s	49°/15°	120°C	11,8
147500	inox / stainless steel	MD	250	FC ₂	68°/20°	145°C	13,1



160349 Controcassa da ordinare separatamente
Recessed housing to be ordered separately



CE | | | | IP67 | IK10 |

