

Il paletto per esterni **Caicos** è in grado di rispondere a molteplici esigenze funzionali ed estetiche. Il suo design essenziale e dalle linee pulite è ideale per illuminare in modo discreto e uniforme, con dispersione di luce ridotta, percorsi pedonali, camminamenti e aree commerciali, pubbliche e residenziali. **Caicos** è un apparecchio a luce diretta e illuminazione diffusa a 360°, disponibile con diffusore in policarbonato trasparente oppure opalino.

Nella versione con diffusore trasparente è accessoriabile con un frangiluce ad alette, in alluminio pretrattato, ideale per direzionare il fascio di luce verso il basso, riducendo l'abbagliamento.

Doppio isolamento: classe II. Alto grado di protezione IP66.

The bollard **Caicos** is able to meet many functional and aesthetic demands. Its essential design, featuring clean lines, is ideal for creating discrete and uniform lighting, considerably reducing dispersion of light in pedestrian routes, walkways as well as in commercial, public and residential areas. **Caicos** provides direct light with diffused illumination (over 360°) and it is available with a clear or an opaline polycarbonate diffuser.

The clear diffuser versions can be supplied with a light refractor accessory, with flaps in pre-treated aluminium, ideal to direct the beam of light downwards, reducing the glare.

Class II, double insulation. High IP66 rating.

- Corpo in estrusione di alluminio verniciato poliesteri con trattamento antiossidante
- Diffusore in policarbonato trasparente oppure opalino
- Basetta in tecnopolimero rinforzato F.V. 30%
- Frangiluce ad alette (dove applicabile)
- Alimentazione elettronica integrata (dove previsto)

- Body in extruded aluminium, polyester-painted, with an anti-oxidation treatment
- Clear or opal polycarbonate diffuser
- Base in techno-polymer reinforced with 30% fibreglass
- Refractor with flaps (where applicable)
- Integrated electronic supply (where applicable)

- Tensione di alimentazione: 230/240V - 50/60Hz (per versioni con lampada fluorescente compatta 26 W)

- Supply voltage: 230/240V - 50/60Hz (for versions including 26W compact fluorescent lamps)



CAICOS

Codice Code	Colore Colour	Lampada Lamp	Watt	Attacco Base	Colour T (K)
----------------	------------------	-----------------	------	-----------------	-----------------




**Diffusore trasparente**  
Clear diffuser

<b>190311</b>	nero / black	FSQ incl.	26	G24q-3	3000
<b>190312</b>	metal / silver	FSQ incl.	26	G24q-3	3000

**Diffusore opale**  
Opal diffuser

<b>190001</b>	nero / black	FBT	21	E27	-
<b>190002</b>	metal / silver	FBT	21	E27	-

CE | | | | | | 850° | IP66 | IK10

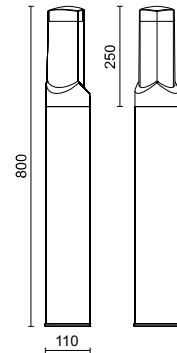

1,9

ACCESSORI  
ACCESSORIES



**160700** Frangiluce per diffusore trasparente e lampada fluorescente compatta  
Light reflector for clear diffuser and compact fluorescent lamp

**160820** Bobina di cavo di alimentazione H05RN-F 2x0,75 mm<sup>2</sup>, 10 m  
10 mt supply cable coil H05RN-F 2x0,75 mm<sup>2</sup>

**84108** Scatola di derivazione stagna IP65  
IP65 rated cable connector

