

Apparecchio a sospensione multilampada per un'illuminazione multidirezionale potente ed efficace con LED COB ad alta efficienza.

Minikep-KS è ideale per negozi, showroom, uffici e spazi collettivi in generale: grazie alla sua grande versatilità, consente di variare la regia luminosa a seconda delle esigenze espositive.

Il design snello e discreto dei corpi illuminanti e la particolare forma rispondono all'esigenza tecnica di dissipazione passiva del calore generato dai LED.

Minikep-KS si installa a soffitto con l'apposita basetta e cavi in acciaio con dispositivi per la regolazione della lunghezza. I quattro corpi illuminanti sono indipendenti e dotati di snodi per consentirne un'orientabilità totale. Disponibile versione con base per applicazioni a parete (vedi pag. 113).

Multilamp suspended luminaire with high efficiency COB LEDs, for a powerful and effective multidirectional lighting.

Minikep-KS is ideal for shops, showrooms, offices and collective spaces: this highly versatile luminaire allows to tune the management of light, depending on the requirements of the show area.

The thin and sober design and the special shape of the spotlights allow to achieve the passive cooling of the heat generated by the LEDs.

Minikep-KS, with four luminaires that can be rotated and adjusted, is provided with base for ceiling installation and with steel wires 2000 mm long, with automatic device for length adjustment. A version with base for ceiling applications is also available (see page 113).



■ Corpo illuminante in pressofusione di alluminio verniciato poliester

Riflettore in termoplastico metallizzato a specchio

Telaio in alluminio verniciato poliester

Rosone in alluminio completo di cavi in acciaio L=2000 mm, con dispositivi automatici per la regolazione della lunghezza

Alimentazione elettronica integrata

■ Bodies of the luminaires in die-cast aluminium polyester painted

Reflector in mirror finished thermoplastic

Frame in die-cast aluminium, polyester painted

Base in aluminium, complete with 2000 mm steel wires, with automatic device for length adjustment


Integrated electronic supply

■ Indice di resa cromatica: Ra > 85

Tensione di alimentazione: 220/240V – 50/60Hz

■ Colour rendering index: Ra > 85

Supply voltage: 220/240V – 50/60Hz

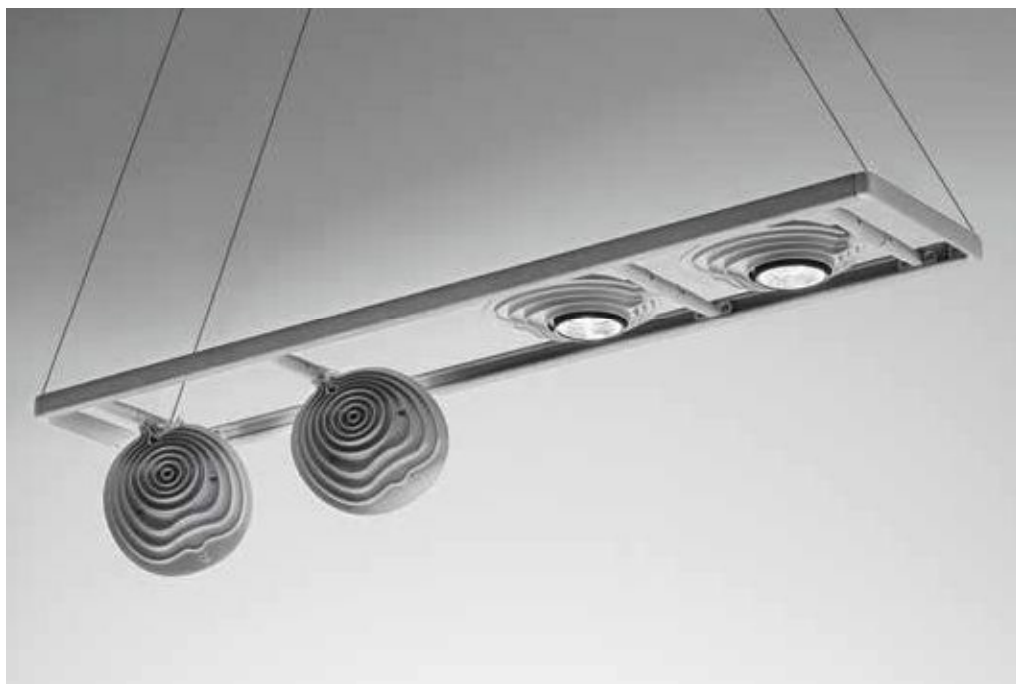

MINIKEP-KS

Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
505-141	LED	4x1500	4x12	3000	30°



21
Bianco mat
Mat white

52
Metal
Silver

