

LUCI DA PLAFONE
CEILING LIGHTS

SERIE PF
modelli di design depositato - registered design models

design
Enrico Davide Bona e Elisa Nobile

La serie delle **plafoniere PF** è stata progettata espressamente per la tecnologia a LED COB di ultima generazione, garantendo una qualità della luce dalle elevate prestazioni.

Tutta la gamma è caratterizzata da un profilo particolarmente sottile e da forme geometriche essenziali quali il cerchio, il quadrato e il rettangolo, che le consentono di essere ambientate in spazi, anche con altezze ridotte, a soffitto o a parete, in ambiti sia residenziali che pubblici.

Costituisce un'alternativa ai punti luce ad incasso, con evidenti economie di installazione.

PF 9 e **PF 10** sono proposte con LED a tensione di rete a 230V, senza necessità di driver.

The range of **PF** ceiling luminaires has been specially designed to be equipped with COB LED sources of last generation, for high quality and high performance in lighting. The whole range is extremely shallow, featuring essential geometric shapes such as the circle, the square and the rectangle, thus it is ideal for a number of applications including low ceilings, both in public and residential areas.

It is a good alternative to downlights, with low installation costs.

PF 9 and **PF 10** are supplied for direct connection to mains voltage 230V, without driver.




MATERIALI E VERSIONI / MATERIALS AND VERSIONS

■ Corpo in pressofusione di alluminio verniciato poliestere
Riflettore sfaccettato in termoplastico ad alta resistenza, metallizzato a specchio ad alto vuoto (per alcune versioni di PF 30 e PF 19)
Diffusore in policarbonato opale ad alta capacità diffondente (su alcune versioni)
Alimentazione elettronica integrata (ad eccezione di PF 9 e PF 10)

■ Indice di resa cromatica: Ra > 80 (per PF 9 e PF 10)
Indice di resa cromatica: Ra > 85 (per le altre versioni)
Tensione di alimentazione: 220/240V – 50/60Hz

■ Body in die-cast aluminium, polyester painted
Faceted reflector in thermoplastic material, high resistant and mirror-metallized in high vacuum (for some versions of PF 30 and PF 19)
Opal polycarbonate diffuser with high light-diffusion capacity (only on some versions)
Integrated electronic supply (except for PF 9 and PF 10)

■ Colour rendering index: Ra > 80 (for PF 9 and PF 10)
Colour rendering index: Ra > 85 (for the other versions)
Supply voltage: 220/240V – 50/60Hz

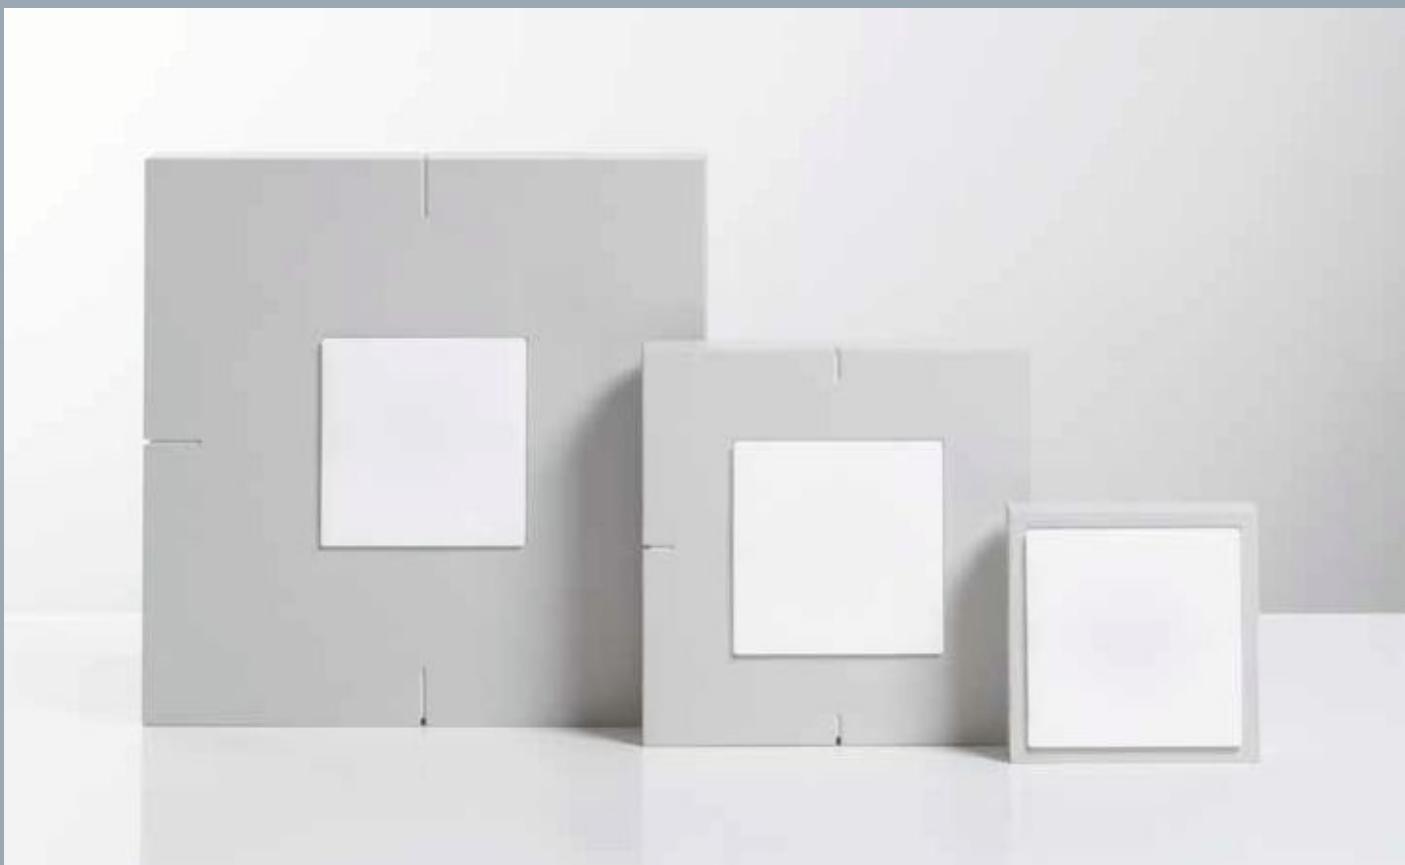

■ PF 9 e PF 10 sono plafoniere di minime dimensioni, non necessitano di driver poiché equipaggiate con LED a tensione di rete 230V-60Hz.

■ PF 9 and PF 10 are ceiling mounted luminaires extremely compact in size due to the absence of driver - the LED connects directly to mains voltage 230V-60Hz.

PF 22




Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
3830-01	LED	2000	18	3000	110°
3831-01	LED	2700	26	3000	110°



21
Bianco mat
Mat white

52
Metal
Silver

CE | RoHS | WEEE | L | F | 850°K | IP43 | A++ A+ A



kg 0,7



PF 15



Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
3825-01	LED	1500	12	3000	110°

21 Bianco mat
Mat white **52** Metal
Silver

CE | (W) | | | | 850° | IP43 | A++ A+ A

30 | 150 | 80 | 150 | 0,6



PF 30




Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
----------------	-----------------	-------	------	-----------------	----------------

Con schermo diffusore
With diffuser



3887-01	LED	2000	18	3000	100°
3888-02	LED	2700	26	3000	100°

21
Bianco mat
Mat white

52
Metal
Silver

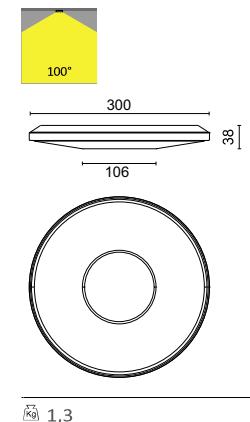


1,3

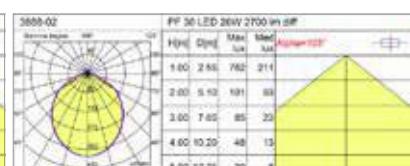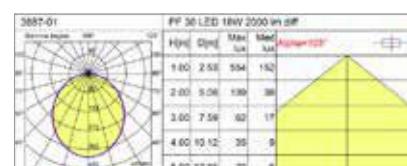

PF 19




Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
Con riflettore 50° With 50° reflector					
3880-02	LED	1500	12	3000	50°
[21] Bianco mat Mat white	[52] Metal Silver				
0,7					

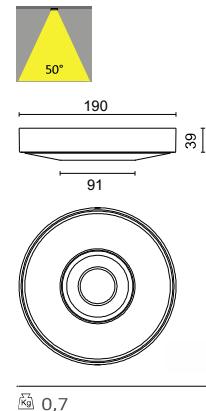

PF 19





Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
Con riflettore 120° With 120° reflector					
3880-01	LED	1500	12	3000	120°
[21] Bianco mat Mat white	[52] Metal Silver				
0,7					

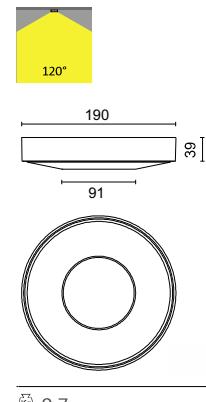

PF 19



Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
Con schermo diffusore With diffuser					
3881-01	LED	1500	12	3000	110°
[21] Bianco mat Mat white	[52] Metal Silver				
0,7					

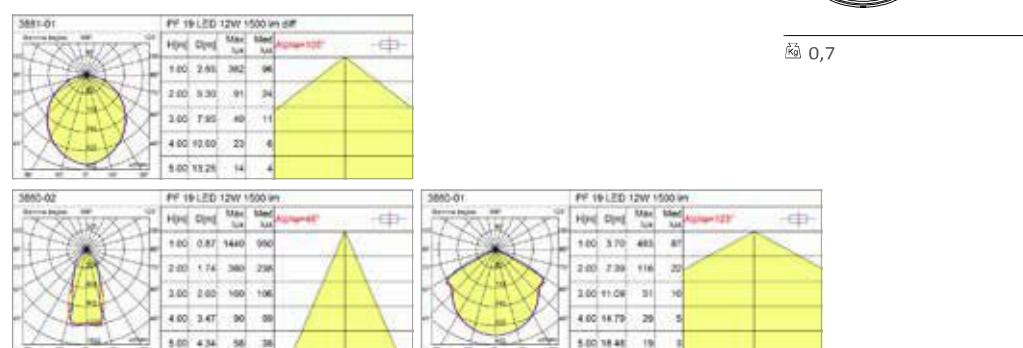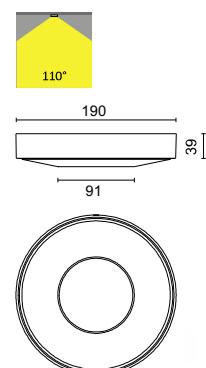

PF 9




Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
Con LED a tensione di rete 230V-60Hz With 230V-60Hz supply voltage Led					
3824-01	LED	400	4,3	3000	110°

[21]
Bianco mat
Mat white

[52]
Metal
Silver

CE | W | ECO | L | F | 850° | IP40 | A++ A+ A



Kg 0,2

PF 10




Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
Con LED a tensione di rete 230V-60Hz With 230V-60Hz supply voltage Led					
3875-01	LED	400	4,3	3000	110°

[21]
Bianco mat
Mat white

[52]
Metal
Silver

CE | W | ECO | L | F | 850° | IP43 | A++ A+ A



Kg 0,3


PF LINE



Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
3893-01	LED	1400	12	3000	115°
3894-01	LED	2600	30	3000	115°

21
Bianco mat
Mat white

52
Metal
Silver



Versione con attacco per parete, vedi pag. 121
Wall mounted version, see page 121

