

La serie **RA L** è composta da incassi per luce diffusa progettati con fonti luminose LED COB di ultima generazione.

È caratterizzata da tre diverse dimensioni e da una profondità di incasso estremamente ridotta: gli apparecchi possono essere installati facilmente, grazie alle molle laterali, in controsoffitti da 1 a 30 mm, anche a doghe. La cornice è integrata nel corpo dei prodotti e permette un montaggio rapido. Il corpo, in pressofusione di alluminio, è stato studiato per rispondere all'esigenza tecnica di dissipazione passiva del calore generato dalla fonte luminosa.

Gli incassi della serie **RA L** garantiscono prestazioni illuminotecniche elevate, ideali per l'illuminazione generale di negozi, uffici e corridoi, per un ottimo rapporto qualità-prezzo.

**RA L** range is made up by downlights for diffused lighting, designed with the last generation of COB LED sources.

It is characterized by three different dimensions and by an extremely reduced recessed depth: these fittings can be installed easily, thanks to the side springs, in false ceilings from 1 to 30 mm, also with staves. The frame is integrated in the fitting's body, allowing a quick installation. The body, in die-cast aluminium, has been designed to meet the technical demand of passive dissipation of the heat generated by the light source.

The **RA L** downlights ensure a high light efficiency, ideal for general lighting in shops, offices and corridors, for an excellent value for money.

- Corpo in pressofusione di alluminio verniciato poliester  
Schermo di chiusura in policarbonato opale ad alta capacità diffondente (per RA7L e RA16L) oppure trasparente (per RA4L)  
Driver incluso (per RA16L)
- Body in die-cast aluminium polyester painted  
Closing screen in opal polycarbonate with high light-diffusion capacity (for RA7L and RA16L) or clear polycarbonate (for RA4L)  
Led driver included (for RA16L)
- Indice di resa cromatica: Ra > 85  
Tensione di alimentazione:  
220/240V – 50/60Hz (per RA 16 L)
- Colour rendering index: Ra > 85  
Supply voltage: 220/240V – 50/60Hz (for RA 16 L)




# RA 16 L





Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
250-220	LED	2000	18	3000	110°

21 Bianco mat  
Mat white

52 Metal  
Silver



Ø 155 mm  
0,9

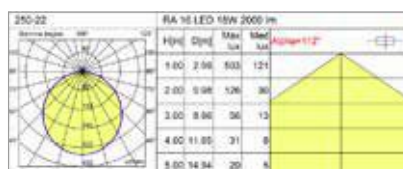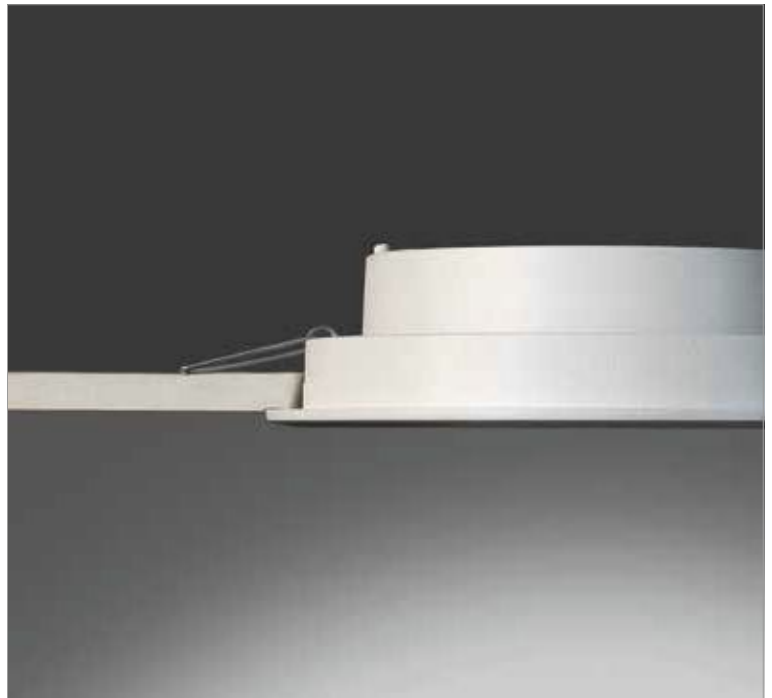


## RA 7 L



Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
-------------	--------------	-------	------	--------------	-------------

251-200	LED	430	4,6	3000	120°
---------	-----	-----	-----	------	------



21

Bianco mat  
Mat white

52


Metal  
Silver



Ø 60 mm


0,2

## RA 4 L



Codice Code	Lampada Lamp	lumen	Watt	Colour T (K)	Fascio Beam
-------------	--------------	-------	------	--------------	-------------

252-200	LED	430	4,6	3000	60°
---------	-----	-----	-----	------	-----



21

Bianco mat  
Mat white

52

Metal  
Silver



Ø 36 mm

0,2

## ACCESSORI ACCESSORIES

Gli incassi RA7L e RA4L necessitano dell'alimentazione (da ordinare separatamente)  
RA7L and RA4L require LED driver (to be ordered separately)

**91-02407** Driver a corrente costante 500mA da 20W (220/240V-50/60Hz)  
Massimo di 3 apparecchi per una distanza limite dall'alimentatore di 30m.

500mA 20W constant current LED driver (220/240V -50/60Hz)  
Max 3 fittings can be connected to each LED Driver, at a max distance from the gear of 30mt.