

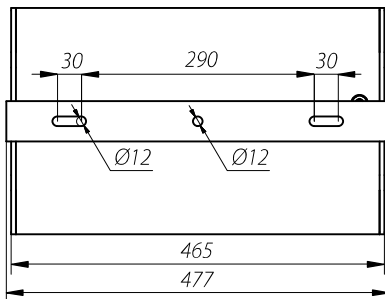


ARTEMIS LED

- **protection degree:** IP66 for the optical part and driver
- **insulation class:** II
- **voltage:** 220-240 V AC, 50/60 Hz
- **light source:** CREE XP-L
- **material:** anodised aluminum alloy
- **colour:** inox/black (possibility of anodising in other colours)
- **assembly:** screwed to extension arm
- possibility to adjust the inclination angle from 0° to 180°
- **recommended mounting height:** from 8 to 10 m depending on the optics
- luminaire is adapted to work in temperatures between -40°C and +40°C
- **optics:** optics available for the removable module can be found on page 18 of the catalogue

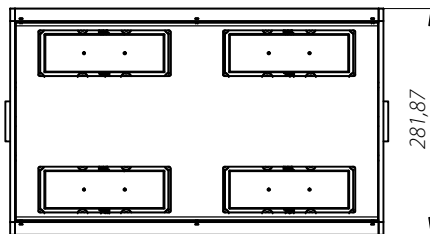

Name	Colour temperature [K]	Code	Power/LEDs amount [W/pcs]	Total power [W]	Luminous flux [lm]*	Luminous efficiency [lm/W]	Weight [kg]	Current product card
ARTEMIS LED	5 000	229041/6	144/48	155	19 500	127	8	
	3 500	229041/3			17 950	117		

* due to the precision class of diodes tolerance is +/-3%



Jędrzejów / Poland



STREET LIGHTING / INDUSTRIAL LUMINAIRES

ARTEMIS LED

Luminaire ARTEMIS LED on column
SAL 100M/P in the height of 10 m
and extension arms WN-3