



GEMINI LED

- **protection degree:** IP 66 for the optical part
- **insulation class:** II
- **supply voltage:** 220-240 V AC, 50/60 Hz
- **light source:** CREE XP-L
- **material:** anodised aluminum alloy
- **colour:** inox / black
- **installation:** on extension arms with spigot ending Ø60 length 100 mm
- **recommended mounting height:** 5-6 m
- luminaire is adapter to work in temperatures between -40°C and +40°C

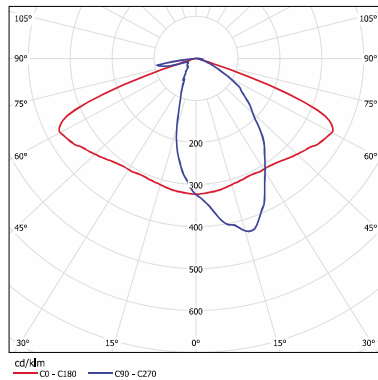

Light distribution curve for luminaire
GEMINI LED 36

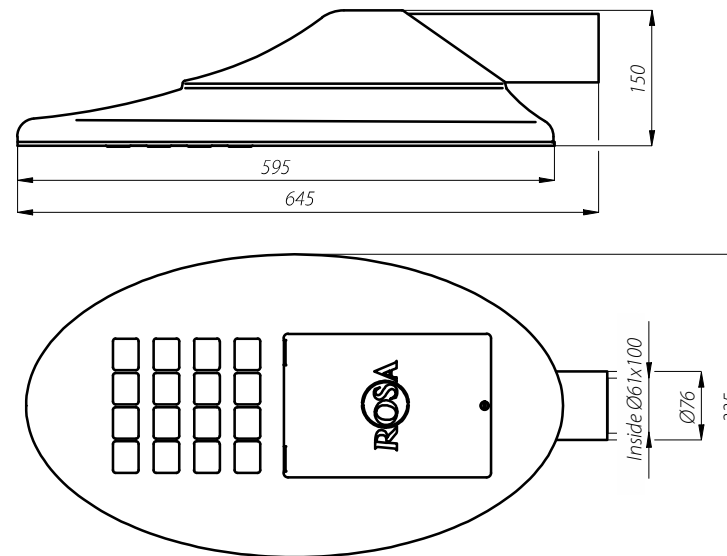

Name	The colour temperature of light [K]	Code	Power / Number of LEDs [W / pcs.]	Total power [W]	Luminous flux [lm]*	Lighting efficiency [lm/W]	Weight [kg]	Current product card
GEMINI LED 36	5 000	214332/6	36/12	42	4 850	115	9,5	
	3 500	214332/3			4 500	107		
GEMINI LED 48	5 000	214333/6	48/16	55	6 500	118		
	3 500	214333/3			6 000	109		

*Due to the LEDs precision class the tolerance value is +/- 3%

Luminaire GEMINI LED
on column SAL DS-52
with height of 5,5 m