
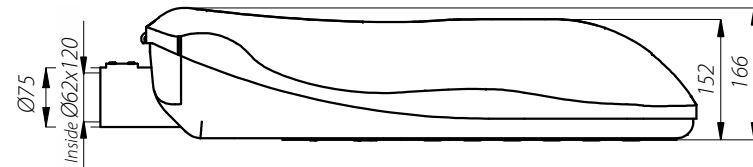


# MAGNOLIA LED

- **protection degree:** IP66
- **insulation class:** II
- **voltage:** 220-240 V AC, 50/60 Hz
- **light source:** CREE XT-E or CREE XP-L
- **material:**
  - body and cover – die cast aluminium-alloy,
- **colour:** body – RAL 9006 structure, cover – SILVER RENOIR (polyester powder paint),
- **assembly:** pole top Ø60 mm and length 120 mm or on extension arm
- **recommended mounting height:** from 6 to 12 m depending on the optics
- **luminaire regulation:** -5° to 20° every 2,5°
- luminaire is adapted to work in temperatures between -40°C and +40°C
- **optics:** optics available for the removable module can be found on page 18 of the catalogue

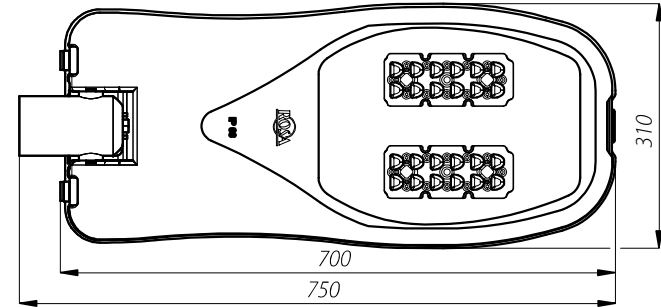

Name	Colour temperature [K]	Code	Power/LEDs amount [W/pcs]	Total power [W]	Luminous flux [lm]*	Luminous efficiency [lm/W]	Weight [kg]	Current product card
MAGNOLIA LED 48	5 000	220933/6	48/24	55	5 000	91	11	
	3 500	220933/3						
MAGNOLIA LED 60	5 000	220934/6	60/24	68	8 100	119		
	3 500	220934/3			7 500	110		
MAGNOLIA LED 72	5 000	220935/6	72/24	80	9 750	122		
	3 500	220935/3			8 950	112		

\* due to the precision class of diodes tolerance is +/-3%



Ostrów Mazowiecki / Poland

STREET LIGHTING / STREET LUMINAIRES

## MAGNOLIA LED



Luminaire MAGNOLIA LED  
on column SAL DS-84 in the height of 8,4 m