



OS-11 LED


- **protection degree:** IP54
- **insulation class:** II
- **supply voltage:** 120-277V AC, 50/60 Hz
- **light source:** CREE LMH-2
- **material:**
 - body - polypropylene with UV resistant glass fiber
 - diffuser - polymethyl methacrylate PMMA frozen
- **colour:** black
- **mounting:** upwards or downwards
- **installation:** on poles type S with spigot ending B, on arms system, wall brackets KR, KP, extension arms, aluminium and steel wall brackets with spigot Ø60
- **recommended mounting height:** 4-5 m
- luminaire is adapter to work in temperatures between -40 C and +40 C

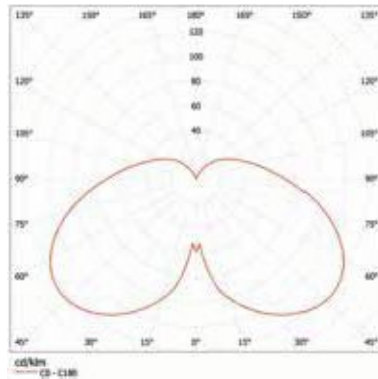

Light distribution curve for luminaire OS-11 LED

Name	The colour temperature of light [K]	Code	Power / Number of LEDs [W / pcs.]	Total power [W]	Luminous flux [lm]*	Lighting efficiency [lm/W]	Weight [kg]	Current product card
OS-11 LED	3 500	2110050/3	38/1	43	3 300	77	5,3	

* due to the LED precision class the tolerance value is +/- 3%

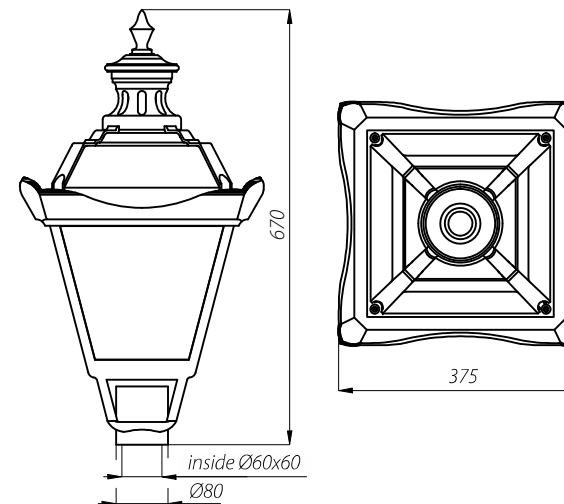

Luminaire OS-1 LED
on pole S-31W with height of 3,32 m



PARK LIGHTING/PARK LUMINAIRES

OS-11 LED

