



PARK LIGHTING/LIGHTING COLUMNS


SAL DECO-3 / SAL DECO-3 LED

- protection degree: IP65
- supply voltage:
220-240 V AC, 50/60 Hz (SAL DECO-3 LED)
230 V AC, 50/60 Hz (SAL DECO-3)
- cylindrical white lamp-diffuser PC-UV,
aluminium decorative elements
- material: anodised aluminium alloy

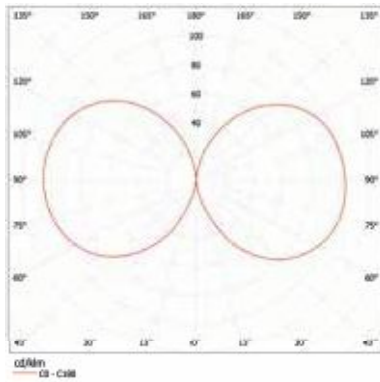

Distribution curve for SAL DECO-3 LED

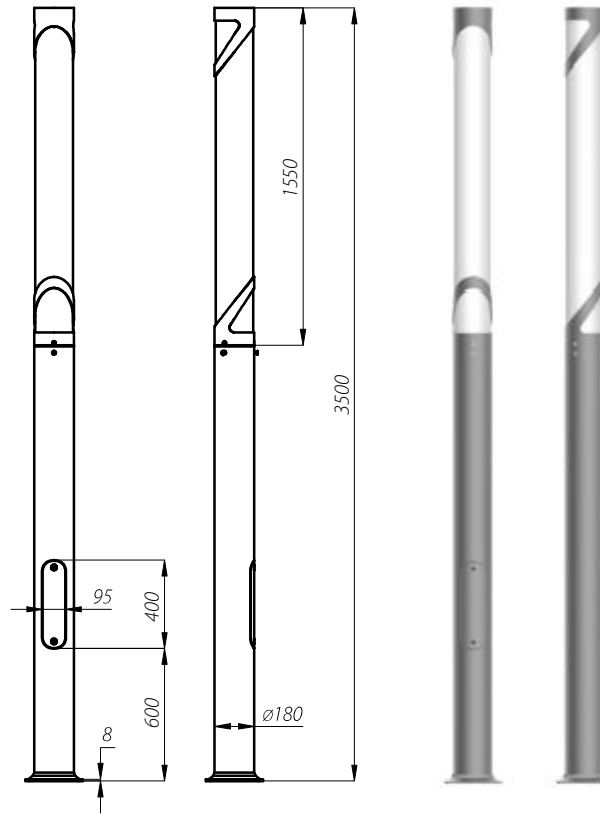

Name	Code	Light source	Insulation class	Supply current [A]	Power / Number of LEDs [W/pcs]	Total power [W]	Luminous flux [lm]*	Concrete footing/Reinforcement basket	Current product card
SAL DECO-3	42922/C...	MH-150W lamp cap G12	I	0,85	150/—	167	4 030	B-51/Z-51	—
SAL DECO-3 LED	42923/C...	CREE XT-E 5000 K	II	0,7	48/24	56	2 500	B-51/Z-51	

C... – choice of anodising colour

* due to the precision class of diodes tolerance is +/-7%