


FLAG POLES

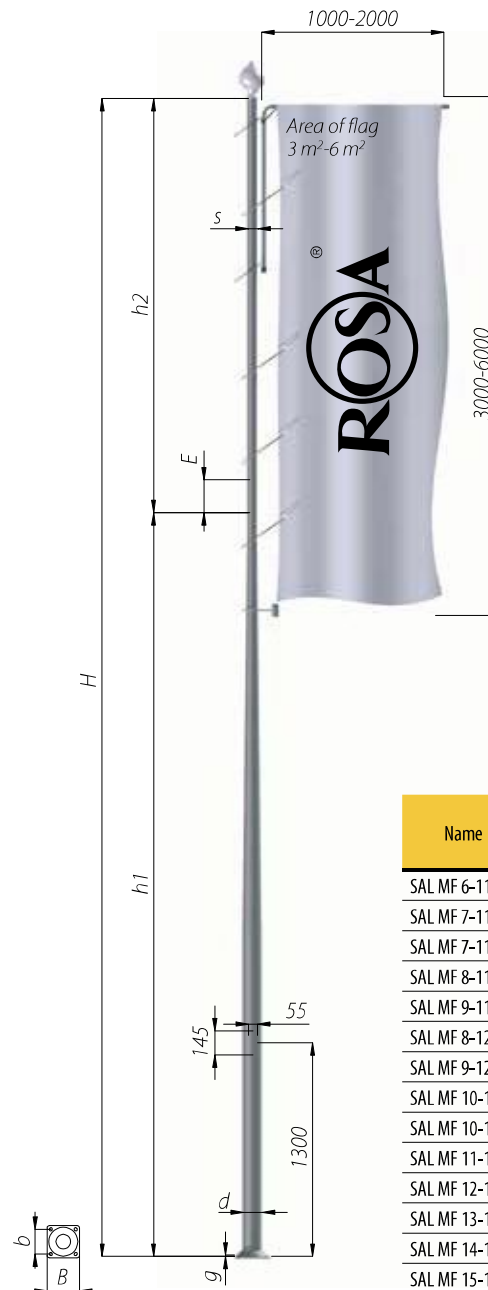

Flag poles are used to hang flags with area from 3 m² to 6 m²

- **material:** anodised aluminium alloy
- **construction:** consists of two sections, bottom part – conical, upper part – cylindrical
- **routing head:** made of plastic, together with cord placed inside the pole which allows the flag to move depending on the wind direction
- **cord:** braided spiral, resistant, 4 mm diameter, white colour
- **flag bob:** grey plasticized metal
- **clamping rings for fixing flag:** 7 pieces as standard
- **niche chamber:** equipped in locks cord

Additional accessories for flag poles:

- **cross-bar for flag of the following lengths:** 1 m, 1,5 m, 2 m
- **top:** gold or silver decorative bal

Name	Code	Height [m]			Diameter at base plate [mm]	Thickness of the base [mm]	Concrete footing/reinforcement basket
		H	h1+E	h2			
SAL MF 6-114	42950/C..	6	4,5+0,2	1,5	Ø114	8	B-50 / Z-50
SAL MF 7-114-1	42951/C..	7	4,5+0,2	2,5	Ø114	8	B-50 / Z-50
SAL MF 7-114-2	42952/C..	7	4,5+0,2	2,5	Ø114	12	B-51 / Z-51
SAL MF 8-114	42953/C..	8	4,5+0,2	3,5	Ø114	12	B-51 / Z-51
SAL MF 9-114	42954/C..	9	4,5+0,2	4,5	Ø114	12	B-51 / Z-51
SAL MF 8-120	42955/C..	8	6,0+0,2	2	Ø120	12	B-51 / Z-51
SAL MF 9-120	42956/C..	9	6,0+0,2	3	Ø120	12	B-51 / Z-51
SAL MF 10-120	42957/C..	10	6,0+0,2	4	Ø120	12	B-51 / Z-51
SAL MF 10-146	42958/C..	10	6,82+0,2	3,18	Ø146	10	B-71 / Z-71
SAL MF 11-146	42959/C..	11	6,82+0,2	4,18	Ø146	10	B-71 / Z-71
SAL MF 12-146	42960/C..	12	6,82+0,2	5,18	Ø146	10	B-71 / Z-71
SAL MF 13-180	42961/C..	13	9,82+0,2	3,18	Ø180	12	B-70 / Z-70
SAL MF 14-180	42962/C..	14	9,82+0,2	4,18	Ø180	12	B-70 / Z-70
SAL MF 15-180	42963/C..	15	9,82+0,2	5,18	Ø180	12	B-70 / Z-70
SAL MF 16-180	42964/C..	16	9,82+0,2	6,18	Ø180	12	B-70 / Z-70