


## FLAG POLES

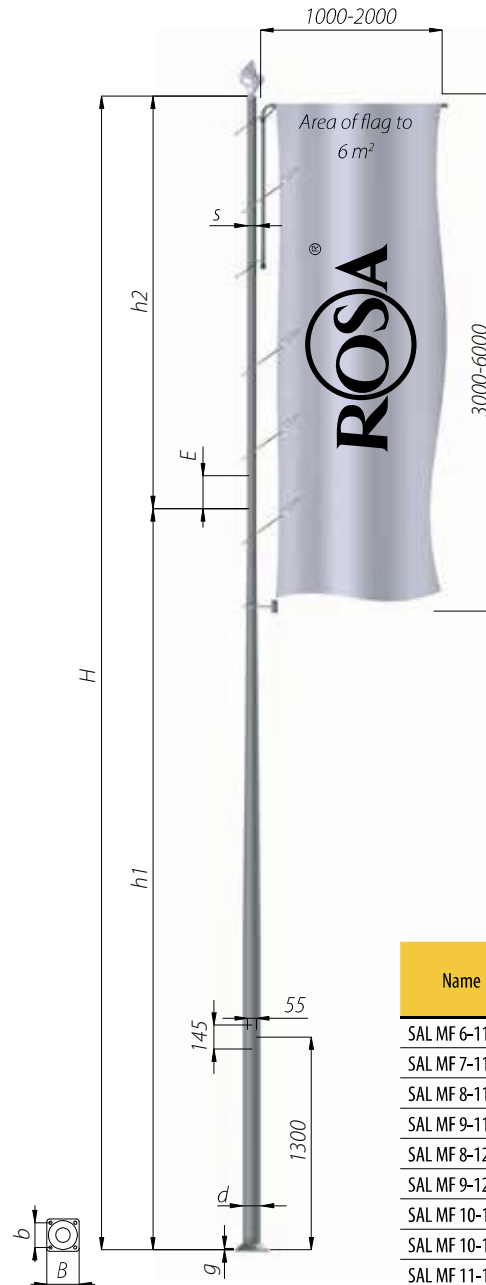

Flagpoles flags are used to mounting flags with area to  $6\text{ m}^2$

- **material:** anodised aluminium alloy
- **construction:** consists of two sections, bottom part – conical, upper part – cylindrical
- **routing head:** made of plastic, together with cord placed inside the pole which allows the flag free movement according to wind direction
- **cord:** braided spiral, resistant, 4 mm diameter, white colour
- **flag bob:** grey plasticized metal
- **clamping rings for fixing flag:** 7 pieces as standard
- **niche chamber:** equipped in locks cord

Additional accessories for flag poles:

- **cross-bar for flag of the following lengths:** 1 m, 1,5 m, 2 m
- **top:** gold or silver decorative bal

Name	Code	Heigh [m]			Diameter at base plate [mm]	Thickness of the base [mm]	Concrete footing/ reinforcement basket
		H	h1+E	h2			
SAL MF 6-114	42950/C...	6	4,5+0,2	1,5	Ø114	8	B-50 / Z-50
SAL MF 7-114-2	42952/C...	7	4,5+0,2	2,5	Ø114	12	B-51 / Z-51
SAL MF 8-114	42953/C...	8	4,5+0,2	3,5	Ø114	12	B-51 / Z-51
SAL MF 9-114	42954/C...	9	4,5+0,2	4,5	Ø114	12	B-51 / Z-51
SAL MF 8-120	42955/C...	8	6,0+0,2	2	Ø120	12	B-51 / Z-51
SAL MF 9-120	42956/C...	9	6,0+0,2	3	Ø120	12	B-51 / Z-51
SAL MF 10-120	42957/C...	10	6,0+0,2	4	Ø120	12	B-51 / Z-51
SAL MF 10-146	42958/C...	10	6,82+0,2	3,18	Ø146	10	B-71 / Z-71
SAL MF 11-146	42959/C...	11	6,82+0,2	4,18	Ø146	10	B-71 / Z-71
SAL MF 12-146	42960/C...	12	6,82+0,2	5,18	Ø146	10	B-71 / Z-71