



STICK LED

- **protection degree:** IP66 for the optical part and driver
- **insulation class:** II
- **supply voltage:** 220-240 V AC, 50/60 Hz
- **light source:** CREE XT-E
- **material:** anodised aluminium alloy
- **standard colour:** inox/gray
- possible to produce any configuration of the lighting arms from 1 to 4
- luminaire is adapted to work in temperatures between -40°C and +55°C

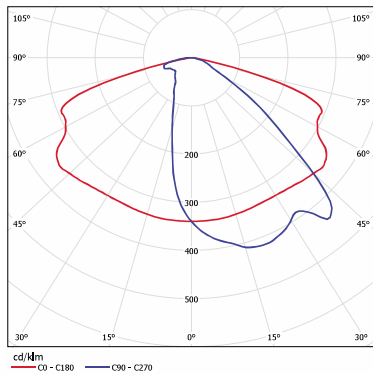

Light distribution curve for STICK LED

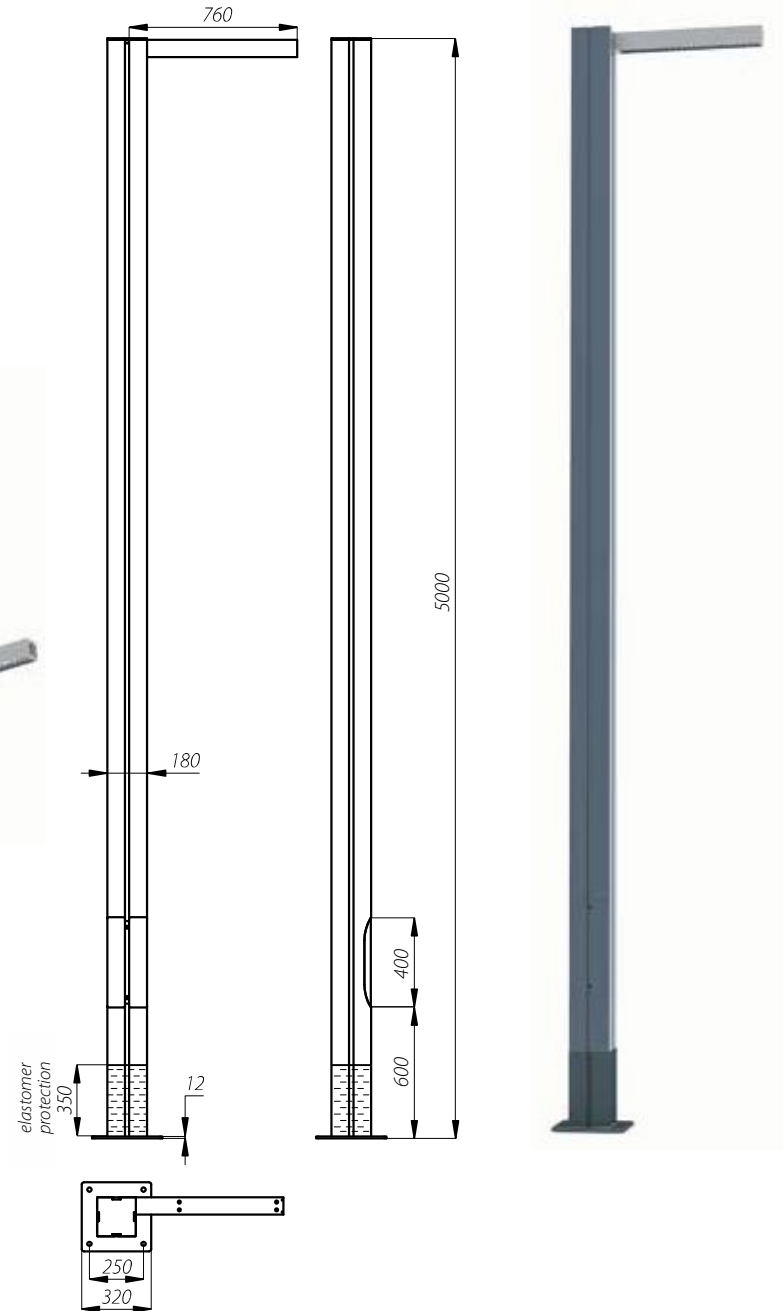

Name	The colour temperature of ligh [K]	Code	Power / Number of LEDs [W / pcs.]	Total power [W]	Luminous flux [lm]*	Lighting efficiency [lm/W]	Weight [kg]	Current product card
STICK LED 24	5 000	217030/6	24/12	31	2300	74	B-60/Z-60	
STICK LED 48		217033/6	48/24	55	4550	83		
STICK II LED 24		217130/6	2 x 24/2 x 12	2 x 31	2 x 2300	74		
STICK II LED 48		217133/6	2 x 48/2 x 24	2 x 55	2 x 4550	83		
STICK III LED 24		217430/6	3 x 24/3 x 12	3 x 31	3 x 2300	74		
STICK III LED 48		217433/6	3 x 48/3 x 24	3 x 55	3 x 4550	83		
STICK IV LED 24		217630/6	4 x 24/4 x 12	4 x 31	4 x 2300	74		
STICK IV LED 48		217633/6	4 x 48/4 x 24	4 x 55	4 x 4550	83		

* due to the LED precision class the tolerance value is +/- 3%